

PUMP UP

YOUR AUTOMOTIVE PROFITS

You want to safely and cost effectively transfer all of your process and waste fluids. You want better pump performance at a reduced cost. You want to work with automotive professionals who know your specific challenges. We have what you need – Gusher air-operated, double diaphragm pumps.

RELIABLE

EFFICIENT


LONG LIFE

EASE OF OPERATION

INTRINSICALLY SAFE

APPLICATIONS

- Waste Oil Transfer
- Machine Tool Lubrication
- Paint Kitchen Duties
- Filter Press Feed
- Corrosion Inhibitor Transfer
- Chroming & Painting
- Various Sump Duties

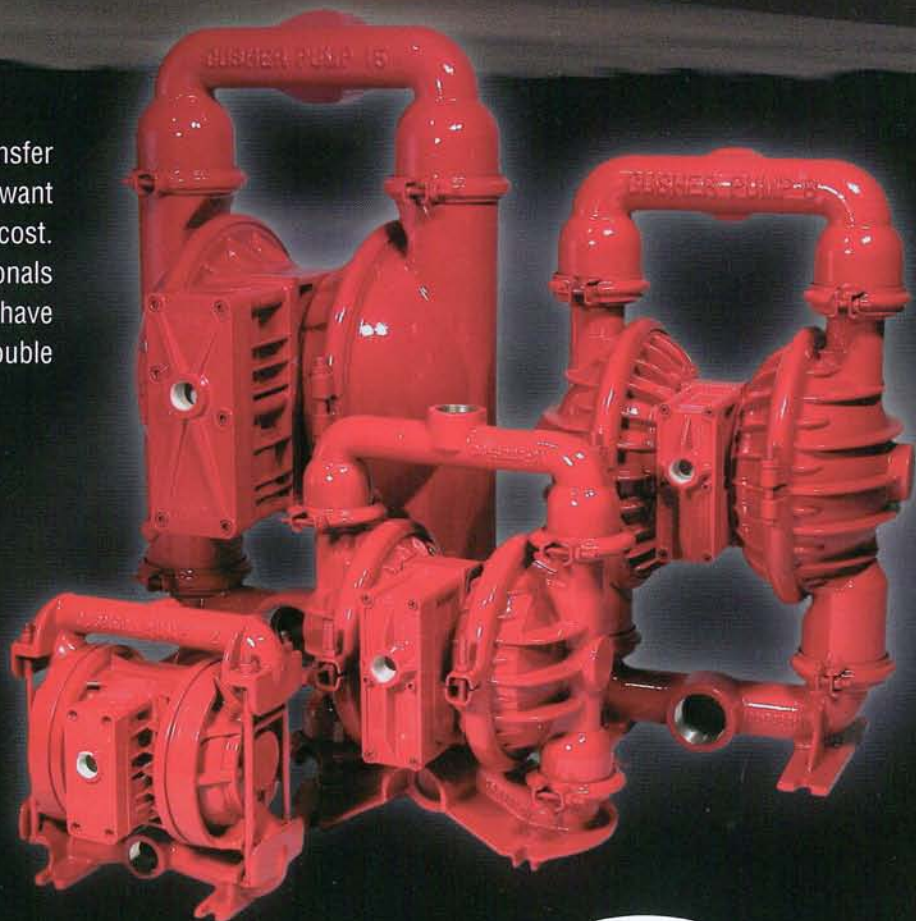

22 Ruthman Drive • Dry Ridge, KY 41035

phone (859) 824-5001 • fax (859) 824-3011 • www.gusher.com

GP2



PERFORMANCE

Max. Flow:
170.3 LPM (45 GPM*)

Max. Pressure:
8.6 Bar (125 PSI)

Max. Size Solids:
3.17 mm (1/8")

Dry Suction Lift:
5.8 m (19')

SPECIFICATIONS

Inlet / Discharge Piping: 25.4 mm (1") / 19.1 mm (.75")

Air Inlet: 6.35 mm (1/4") FNPT

Height: 279.4 mm (11")

Width: 267.5 mm (10 17/32")

Depth: 200.8 mm (7 29/32")

Wetted Materials: Aluminum, Stainless Steel

Elastomers: Buna-N, Teflon® PTFE, Santoprene

GP4



PERFORMANCE

Max. Flow:
306.5 LPM (81 GPM*)

Max. Pressure:
8.6 Bar (125 PSI)

Max. Size Solids:
4.76 mm (3/16")

Dry Suction Lift:
5.8 m (19')

SPECIFICATIONS

Inlet / Discharge Piping: 38.1 mm (1 1/2") / 31.75 mm (1 1/4")

Air Inlet: 12.7 mm (1/2") FNPT

Height: 428.6 mm (16 7/8")


Width: 369.1 mm (14 17/32")

Depth: 285.8 mm (11 1/4")

Wetted Materials: Aluminum, Cast Iron, Stainless Steel

Elastomers: Buna-N, Teflon® PTFE, Santoprene

GP8

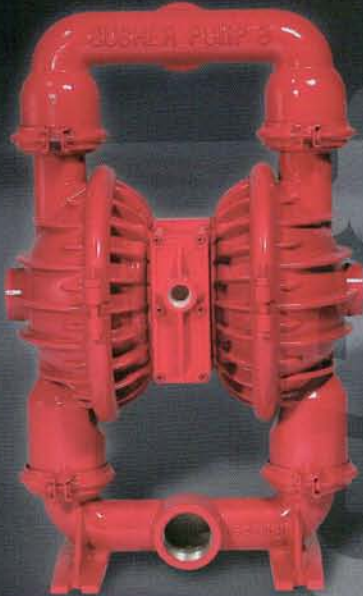

PERFORMANCE

Max. Flow:
590.5 LPM (156 GPM*)

Max. Pressure:
8.6 Bar (125 PSI)

Max. Size Solids:
6.35 mm (1/4")

Dry Suction Lift:
7.0 m (23')

SPECIFICATIONS

Inlet / Discharge Piping: 50.8 mm (2") / 50.8 mm (2")

Air Inlet: 12.7 mm (1/2") FNPT

Height: 669.2 mm (26 11/32")

Width: 404.0 mm (15 29/32")

Depth: 342.9 mm (13 1/2")

Wetted Materials: Aluminum, Cast Iron, Stainless Steel

Elastomers: Buna-N, Teflon® PTFE, Santoprene

GP15



PERFORMANCE

Max. Flow:
919 LPM (242.7 GPM*)

Max. Pressure:
8.6 Bar (125 PSI)

Max. Size Solids:
9.53 mm (3/8")

Dry Suction Lift:
6.7 m (22.1')

SPECIFICATIONS

Inlet / Discharge Piping: 76.2 mm (3") / 76.2 mm (3")

Air Inlet: 12.7 mm (1/2") FNPT

Height: 822.5 mm (32")

Width: 404.0 mm (15 29/32")

Depth: 342.9 mm (13 1/2")

Wetted Materials: Aluminum, Cast Iron, Stainless Steel

Elastomers: Buna-N, Teflon® PTFE, Santoprene

*denotes U.S. Gallons per Minute

